



## S – Series Single Layer GAP Capacitors

The S-Series Single Layer Gap Capacitors (SLCs) are ideally suited for applications such as micro-strip circuits or stripline microwave circuits.

## S-Series SLCs are suitable solutions for applications that require:

- Most minimum insertion loss.
- Lowest heat exertion levels.
- Controlled gap in micro-strip.
- Custom sized widths to adhere to stripline gaps.
- Direct mounting onto stripline without wire bonding.
- Various attachment options, including solder, epoxy, and eutectics.



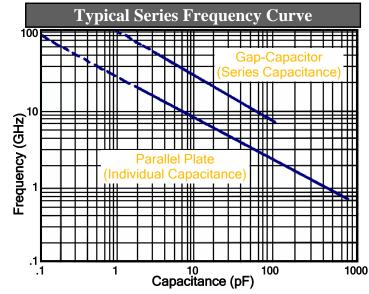

Case Size	<u>S20</u>	<u>S24</u>	<u>S25</u>	<u>S29</u>	<u>S30</u>	<u>S50</u>				
Width (W)	.020 (.508)	.025 (.635)	.025 (.635)	.030 (.762)	.030 (.762)	.050 (1.27)				
Length (L)	.040 (1.02)	.040 (1.02)	.050 (1.27)	.050 (1.27)	.080 (2.03)	.080 (2.03)				
Thickness (T)		.005 (.127)	.005 (.127)	.005 (.127)	.005 (.127)	.005 (.127)	.006 (.152)			
Max. Gap Wid	.005 (.127)	.005 (.127)	.010 (.254)	.010 (.254)	.020 (.508)	.020 (.508)				
ode	G	0.5	0.6	0.7	1.1	1.5	2.4			
Equivalent C Series Series Capacitance	Ν	0.7	1.0	1.1	1.8	2.2	3.9			
Capacitance	Ρ	1.0	1.3	1.5	2.4	3.0	4.7			
	_	1.8	2.2	2.7	4.3	5.1	8.2			
(pF) (pF)	Х	12	18	22	33	39	56			
Ten	Ζ	27	33	47	68	82	150			

SELECTION GUIDE

Tolerance ±.002 (.050) or 10%, whichever is greater

**Dielectric Strength:** 2.5 x WVDC min @ 25°C, 50 mA max **Test Conditions:** All Values @ 1Mhz, 1.0±0.2Vrms, 25°C

\*\* All capacitors are rated at 50 VDC, for other sizes, voltages, and other configurations, contact the Factory. \*\*

ORDERING INFORMATION										
<u>Style</u>	<u>Case Size</u>	Temp. Coefficient Capacitance		<u>Tolerance</u>	<u>Voltage</u>	Termination	<u>Hi-Reli Testing</u>			
S	20	X	120	K	500	G	- A			
<b>S</b> Gap Series		G N P R X Z	First 2 digits are Significant; Third digit indicates number of Zeros Examples: 201 = 200pF 2R2 = 2.2pF	C ±0.25pF D ±0.50pF J ±5% K ±10% M ±20% Z -20%, +80%	First 2 digits are Significant; Third digit indicates number of Zeros Examples: 201 = 200V 151 = 150V 202 = 2000V	<b>G</b> Gold Plated (RoHS Compliant)	(Optional) A = Group A B = Groups A & B C = Group C D = Special Testing			



CAPAX TECHNOLOGIES, INC • 24842 AVE TIBBITTS • VALENCIA, CA • 91355 • 661.257.7666 • FAX: 661.257.4819

